

Connectors for Photovoltaic Module : PV-03 Series

■ Features

1. A connector for connection of photovoltaic modules with cables.
2. The process for waterproof being completed with easy operation without tool, due to our original water-tightness structure (top and bottom cover system).
3. Excellent contact performance due to our original multi-point contact structure.
4. The plug and socket can be unmated without using jig.
5. EN recognized.
6. Large current capacity.
7. Plastics of good weatherability and flame retardancy used.
8. IP protection class is IP67 (mating), ensuing higher safety and waterproof performance.


■ Specifications

- Rating : 1000V DC, 30A
- Operating Temperature Range : -40°C to +90°C
- IP Protection Class : IP67 (When mating) / IP2X (When not mating)
- Applicable Cable O.D. : $\Phi 6.0$, $\Phi 6.5$, $\Phi 7.0$
- Applicable Terminal

Plug Socket	Part No.	Applicable Wire Size (Sq)
Plug	CTA9111-01□□F	2.0 to 6.0
	CTA9116-04□□F	1.5 to 2.0
Socket	CTA9111-02□□F	2.0 to 6.0
	CTA9116-05□□F	1.5 to 2.0


□□	Packing Style
01	Reel
11	Bulk

Connectors for Photovoltaic Module : PV-03 Series

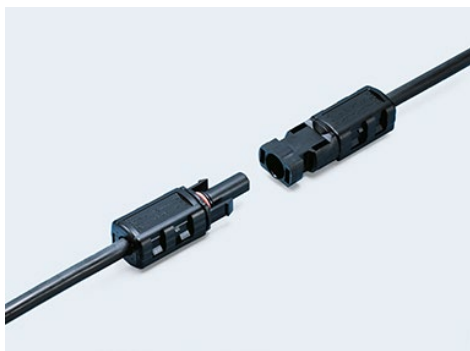


Plug Socket	☐ ☐	Applicable Cable O.D. (Φ)
Plug	4F	6.0
	2F	6.5
	1F	7.0
Socket	4F	6.0
	2G	6.5
	1G	7.0

Plug : CCT9901-236 ☐ ☐

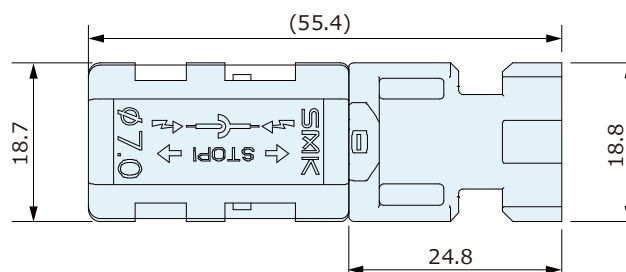

Socket : CCT9901-245 ☐ ☐

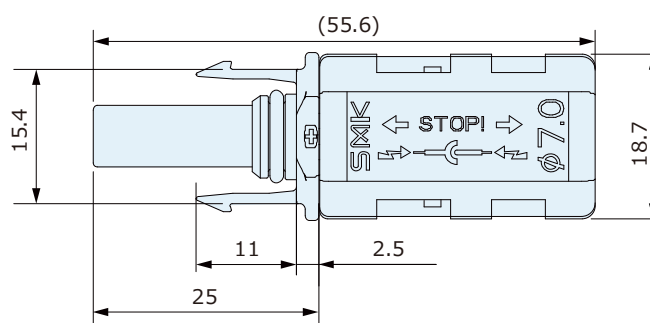

<Mating plug and socket>

