

Interface Connectors

USB2.0 Micro-B Receptacle

■ Features


1. Conforms to the USB 2.0 specification.
2. Both normal type and reverse types available.

■ Specifications

- Number of Pins : 5
- Rating : 1.8A (power) 1.0A (signal), 30V AC
- Contact Resistance : 30mΩ max.
- Insulation Resistance : 1000MΩmin. at 500V DC
- Withstanding Voltage : 500V AC (for one minute)
- Operating Temperature Range : -30°C to +80°C
- Operating Life : 10000 cycles




CSS5005-4R11F

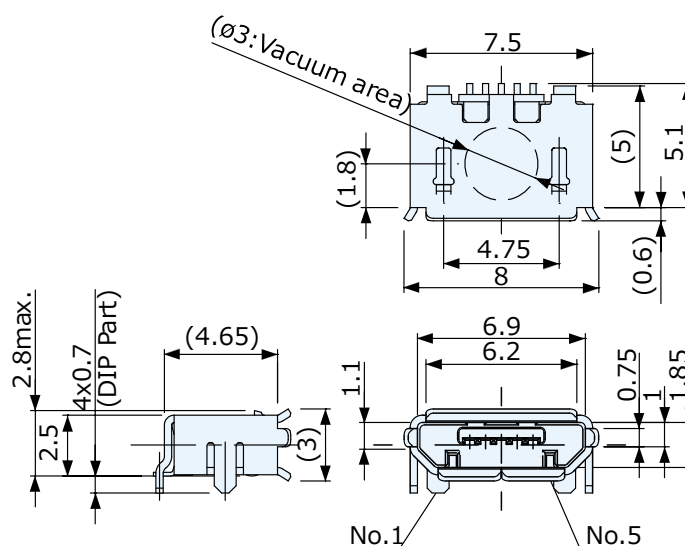

**On Board
Normal / Shell : DIP**




CSS5305-0901F

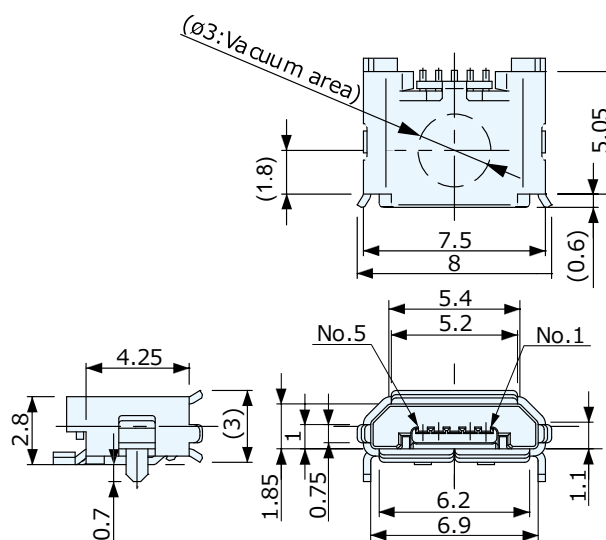


**On Board
Reverse / Shell : DIP(Front) • SMT(Rear)**

Interface Connectors

USB2.0 Micro-B Receptacle

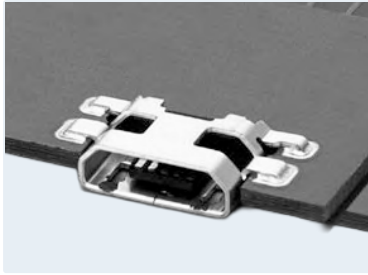

CSS5305-9301F

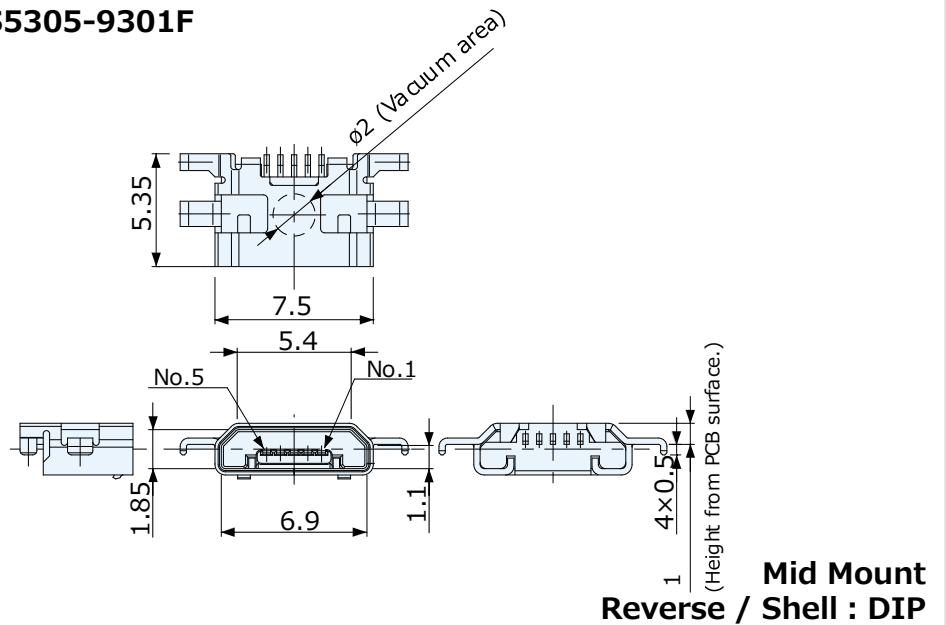

CSS5305-4503F

